



Instruction to remove the on/off switch and install the pull chain switch


1. disconnect the on/off switch wiring from the terminal block and driver. Press the button down and remove the on/off switch.

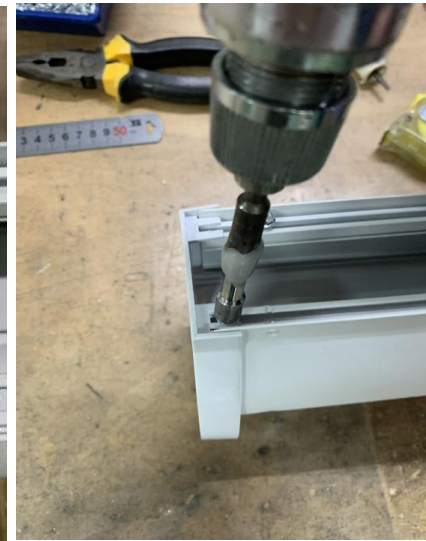


2. Loosen the three screws and remove the plastic end cap. (don't remove the three screws, just loosen them).

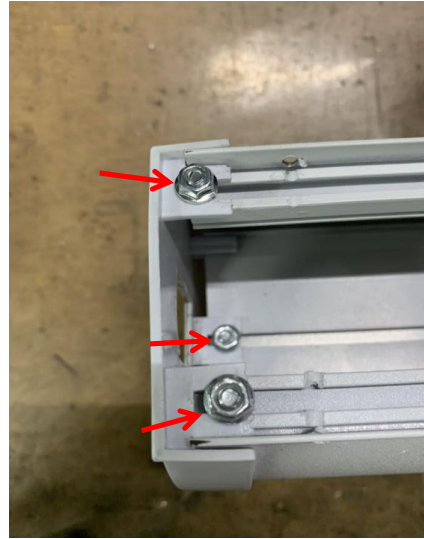

3. Install the new plastic end cap and affix it using the three screws.

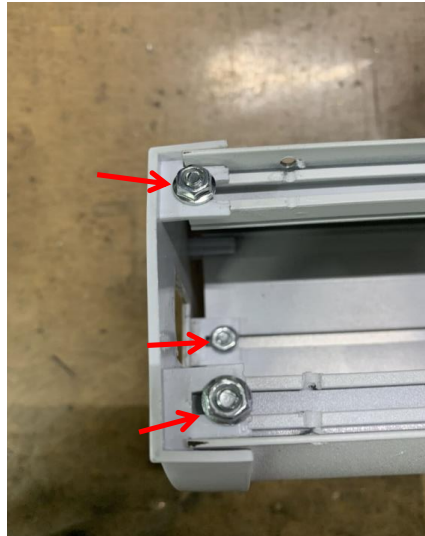

4. Install the pull chain switch. Pass the pull chain through the hole, install/affix the screw nut.


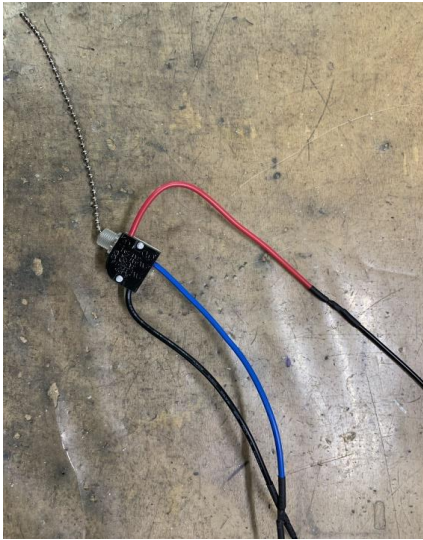


5. Connect the wiring.

The black wire connects to the "L" of terminal block.
The red wire connects to the "L" of primary driver.
The blue wire connects to the "L" of secondary driver.

Primary and Secondary drivers are used for up and down illumination accordingly. The red wire is connected to the side (up or down - primary or secondary driver) you want to turn on first.

Depending if you want the up light on first or the down light on first you will wire the red wire accordingly.

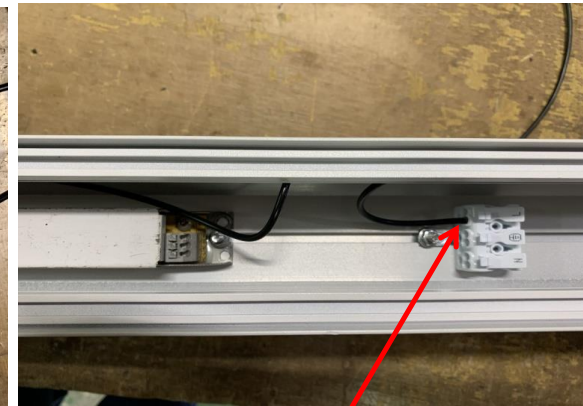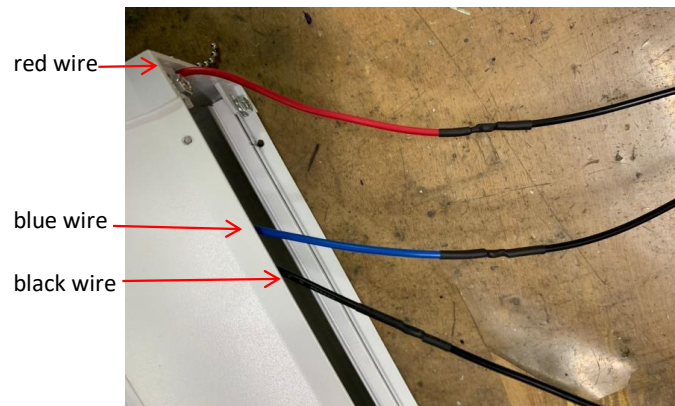

The black wire connects to the "L" of terminal block.