

LED STADIUM LIGHT LSLR – 300-400-500-600 Version B



LED Stadium Light (Round)

High Efficacy up to 160 lm/W and up to 85% in energy savings available in 300W-1,200W configurations.

APPLICATIONS

- Parking
- Commercial
- Ports
- Sports Facilities
- Parks and Recreation
- Automotive
- Service Center
- Mining




AUTHORIZED BY:

NAME:

DATE:

DIMENSIONS & WEIGHT			PACKAGING		
PRODUCT LINE	MEASUREMENTS L x W x H (cm)	WEIGHT (Kg)	MEASUREMENTS L x W x H (cm)	GROSS WEIGHT (Kg)	PCS / BOX
LSLR-300/400/500 BRK - Mount	45.3 x 64.4 x 48.4	17.2	63.5 x 52.5 x 38.5	21.8	1
LSLR-300/400/500 RTA - Mount	40.9 x 51.5 x 74.5	17.2	73.5 x 52.5 x 38.5	24.7	1
LSLR-600 BRK - Mount	45.3 x 64.4 x 48.4	18.2	63.5 x 52.5 x 38.5	22.8	1
LSLR-600 RTA - Mount	40.9 x 51.5 x 74.5	18.2	73.5 x 52.5 x 38.5	25.7	1

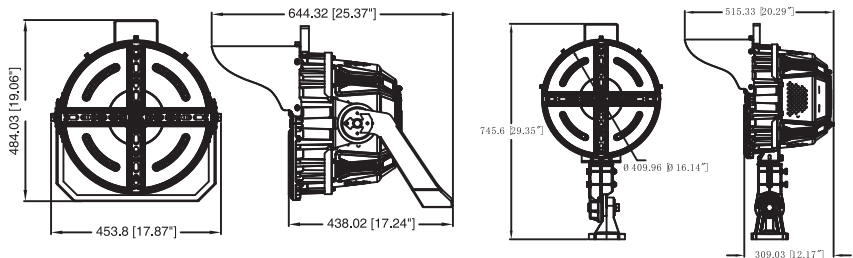

PRODUCT SPECIFICATIONS

Construction Characteristics:

- High grade aluminum housing
- Multi-colour architectural trim
- Powder coat finish (Black)
- IP 66 – suitable for outdoor use
- Optional laser sight (for pointing/positioning)
- 3G vibration certified
- IK10 impact resistant

Optical Characteristics:

- CRI (Color Rendering Index): >70
- Various optical lenses available

Electrical Characteristics:

- Input Voltage: 120 ~ 277 VAC or 277-480 VAC, 50/60 Hz
- Power Factor > 0.9 at full load
- THD < 20%
- Operating Temperature Range: -40 ~ +50C
- Internal and external surge protection
- Surge protection: 10kV/10kA or 20kV/20kA
- Remote power available upon request

ORDERING INFORMATION

CNX-LSLR				
PRODUCT TYPE	CCT	OPTICS	WATTAGE	FIXTURE COLOR
CNX-LSLR (Version B)	30 – 3000K 40 – 4000K 50 – 5000K 57 – 5700K	015 – 15 DEGREE 030 – 30 DEGREE 045 – 45 DEGREE 080 – 80 DEGREE *15 Degrees not avail for 1200W & 600W models	0300 – 300 WATT 0400 – 400 WATT 0500 – 500 WATT 0600 – 600 WATT	RED – BLACK+RED BLU – BLACK+BLUE GRN – BLACK+GREEN GRY – BLACK+GREY BLK – BLACK+BLACK

PRODUCT OPTIONS


INPUT VOLTAGE	MOUNTING	BAFFLE	SURGE	CONTROL
P1 – 120~277 VAC P2 – 277~480 VAC	BRK – BRACKET RTA – ROTATABLE ARM	BFL – BAFFLE XXX – NO BAFFLE	10K – 10KV 20K – 20KV	CTR – CNX CONTROL DAL – 1-10V DALI ZIG – ZIGBEE MTN – MOTION XXX – NO CONTROL

ELECTRICAL DATA

SYSTEM WATTAGE	LUMEN OUTPUT	EFFICACY
300 WATTS	48,000 LUMENS	160 LM/W
400 WATTS	64,000 LUMENS	160 LM/W
500 WATTS	80,000 LUMENS	160 LM/W
600 WATTS	96,000 LUMENS	160 LM/W



BRK – BRACKET MOUNT

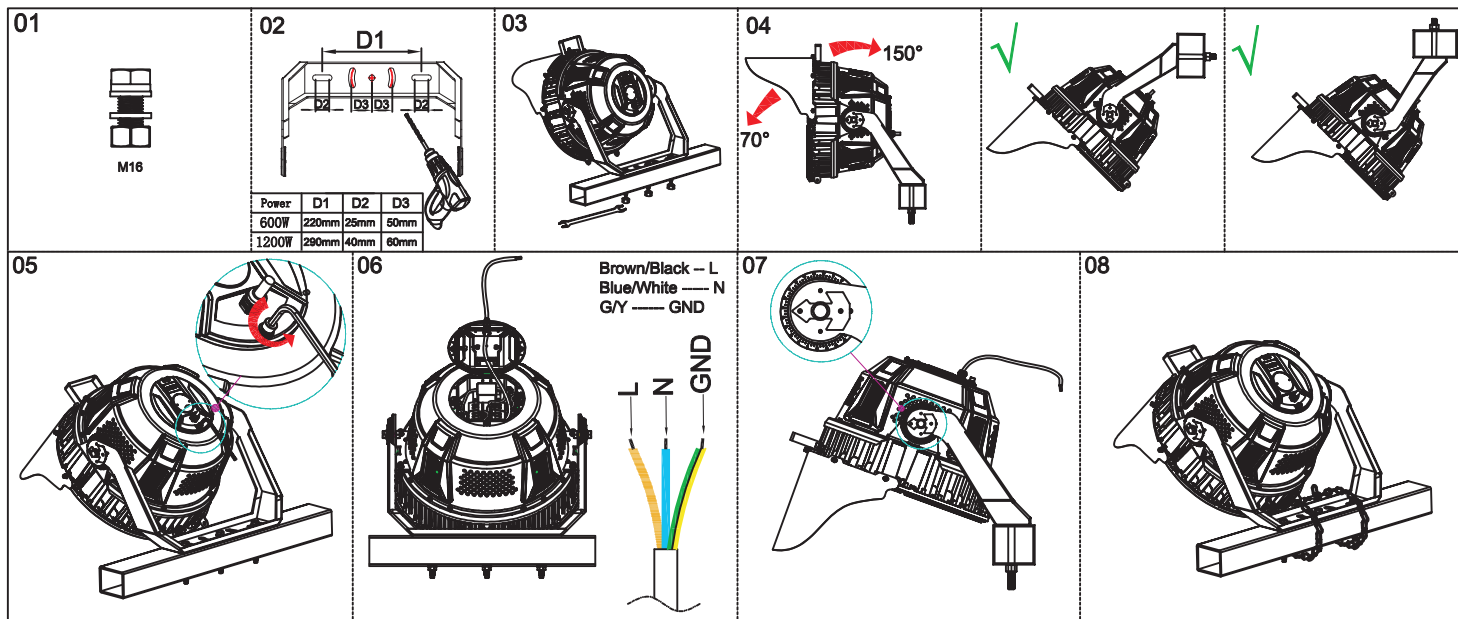

RTA – ROTATABLE ARM MOUNT

