




Magnetic track lighting system

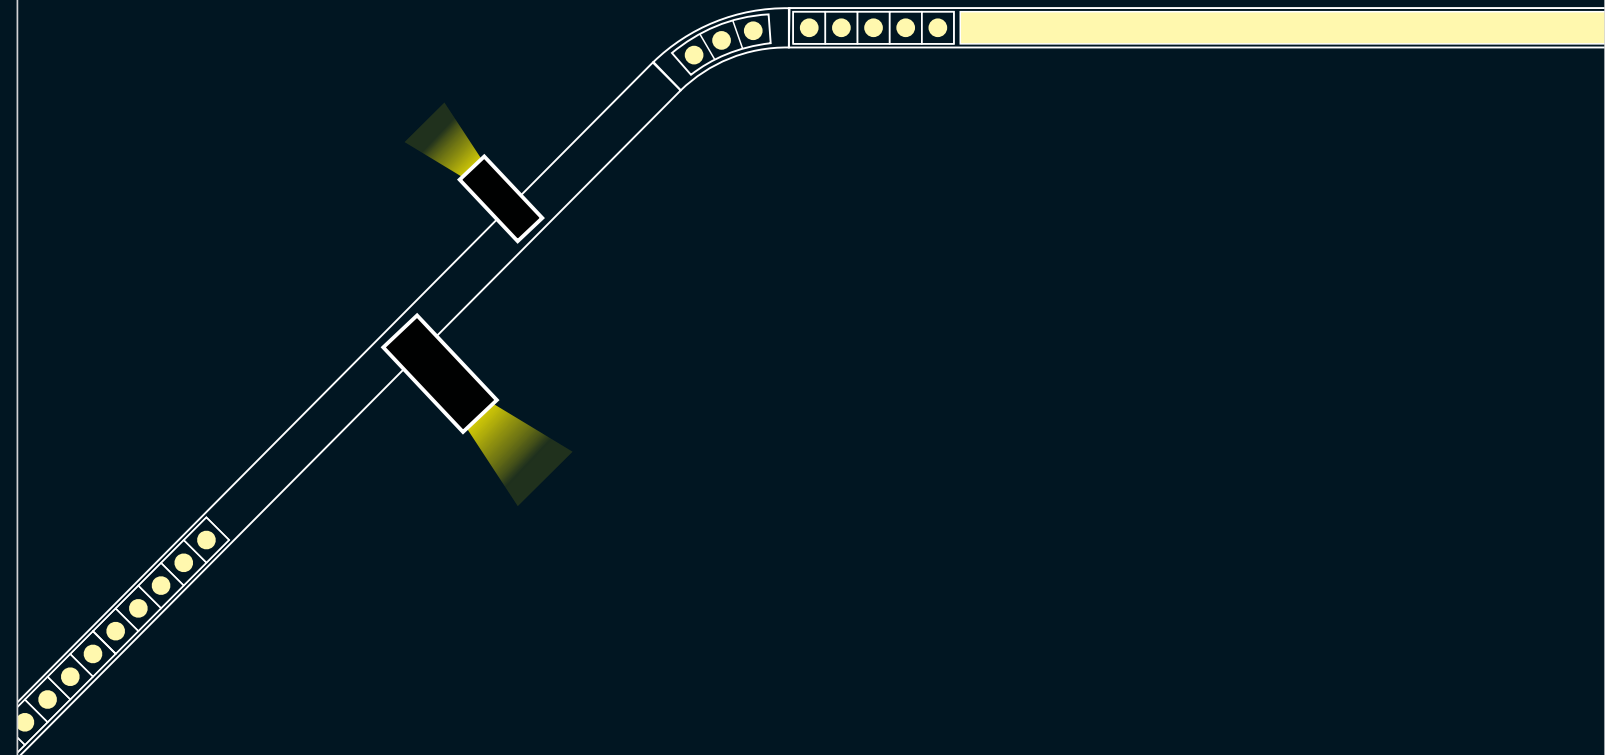


CONXCORP

2-6350 Netherhart Road, Mississauga, Ontario L5T 1K3, Canada
www.conxcorp.com

Contents

STANDARD	11-26
Track	11-14
Accessories	15
Dot	16-17
Linear	18-20
Fold	21-24
Wall washer	25
Out	26
ADAPTERS	27-50
Spot	29-36
Halo	37-42
Pendant	43-48
Global	49-50
MINI	51-60
Track	51-54
Dot	55-56
Linear	57-58
Fold	59-60
CURVY	61-66
Track	61-64
Dot	65
Linear	66

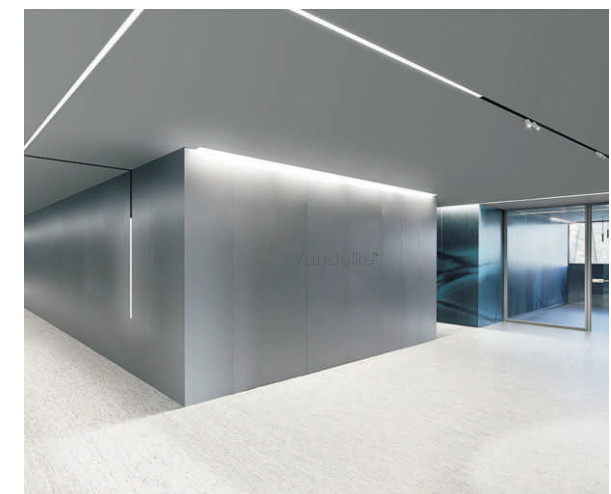


The lighting industry is constantly changing and developing. That's why CONXCORP is always committed to offer the newest technologies in architectural lighting. Our products are focused on simplicity & convenience. Our aim is to offer human centric lighting that is based on visual comfort, seamless structure, natural color temperature alternative and smart controlled system.

Our devotion during these years to always produce seamless designs, quality and unique magnetic installations allowed our customers around the world to offer cutting edge products that made them highly competitive in their markets.



Magnet Durability

The magnet we use is NdFeB rare-earth permanent magnet, it's the most powerful magnet on the earth. The model is N35, 3600 (+-10%) Gauss, Working temperature up to 80°C, Curie temperature is 240°C (failure at this temperature).

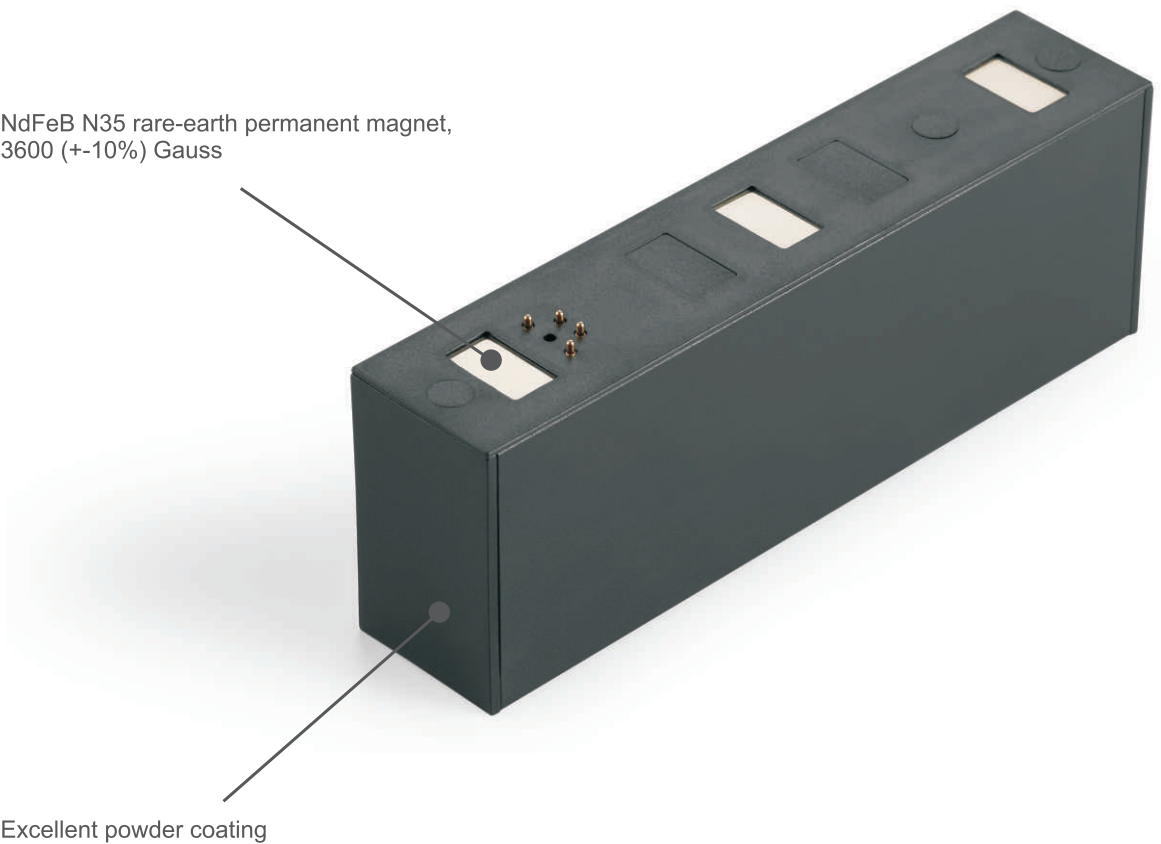


Perfect Surface treatment

The surface treatment offers perfect strong adhesion finishing to protect the fixtures from moisture. In addition, the strong corrosion resistance and good heat conduction and dissipations ensure the fixtures effectiveness. The coating is with special powder to ensure the flawless finishing.

Research & Developments

WE ARE CONSTANTLY EVALUATING TECHNOLOGIOES TO OFFER THE BEST NATURAL LIGHTING IN OUR FIXTURES

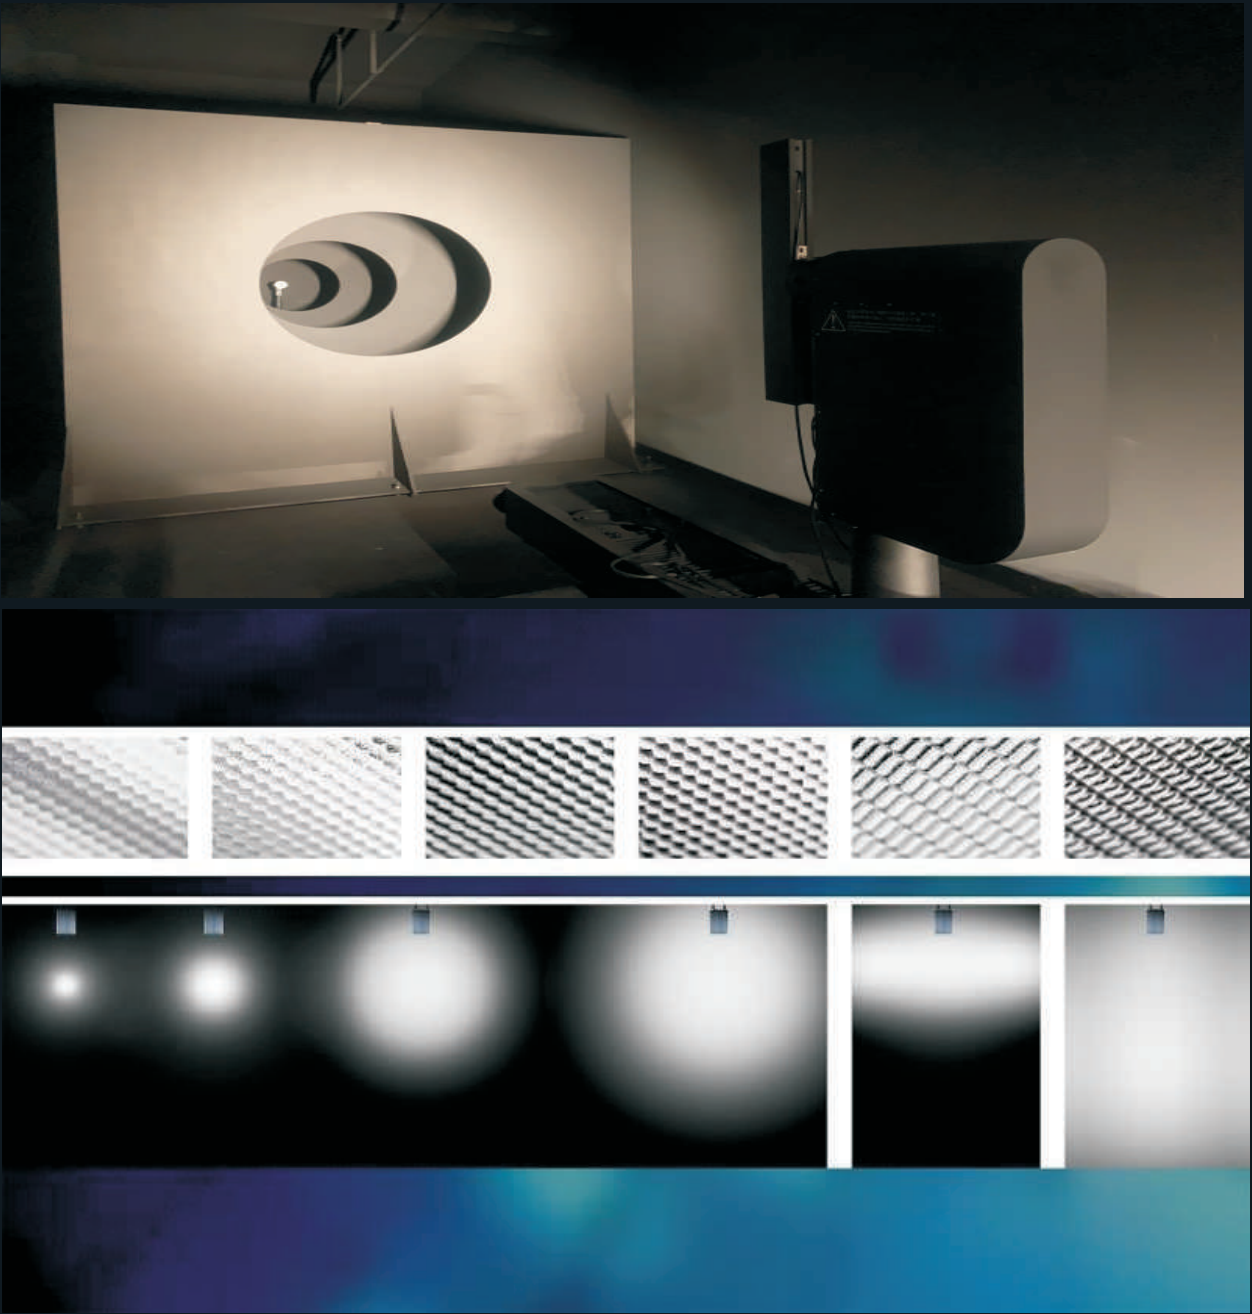




Thanks to the convenient structure our systems are used in various spaces from commercial to residential settings.

TWO DESIGNS


Two sizes of magnetic system to fit all your spaces.

The 39 mm tracks offer lighting fixtures that have higher power & luminance to fit spaces with higher ceilings.

The 27.5 mm tracks are our newest slimmer editions offering seamless designs that look great in residential spaces.




39mm



27.5mm

Two input voltages:

DC24V / DC48V

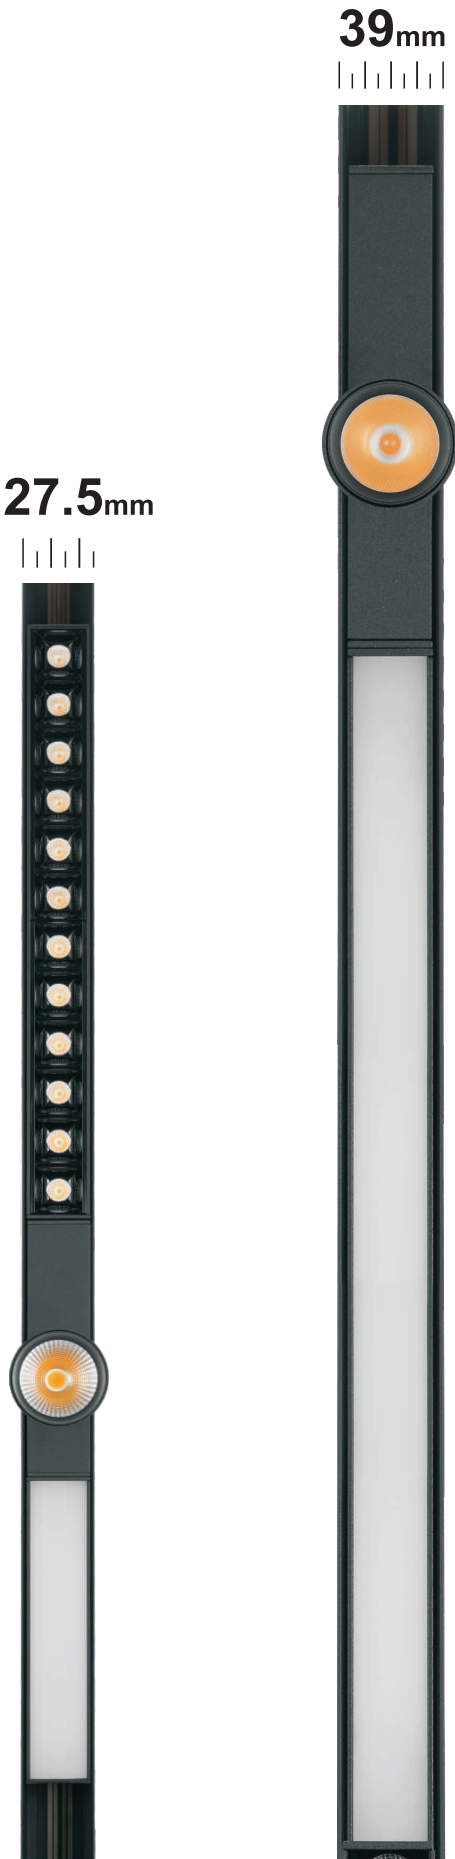

27.5 mm

39 mm

27.5 mm

39 mm

27.5 mm

39 mm

Various Installations:

surface/recessed/pendant



Black



White






Golden



Black bronze


Seamless connection

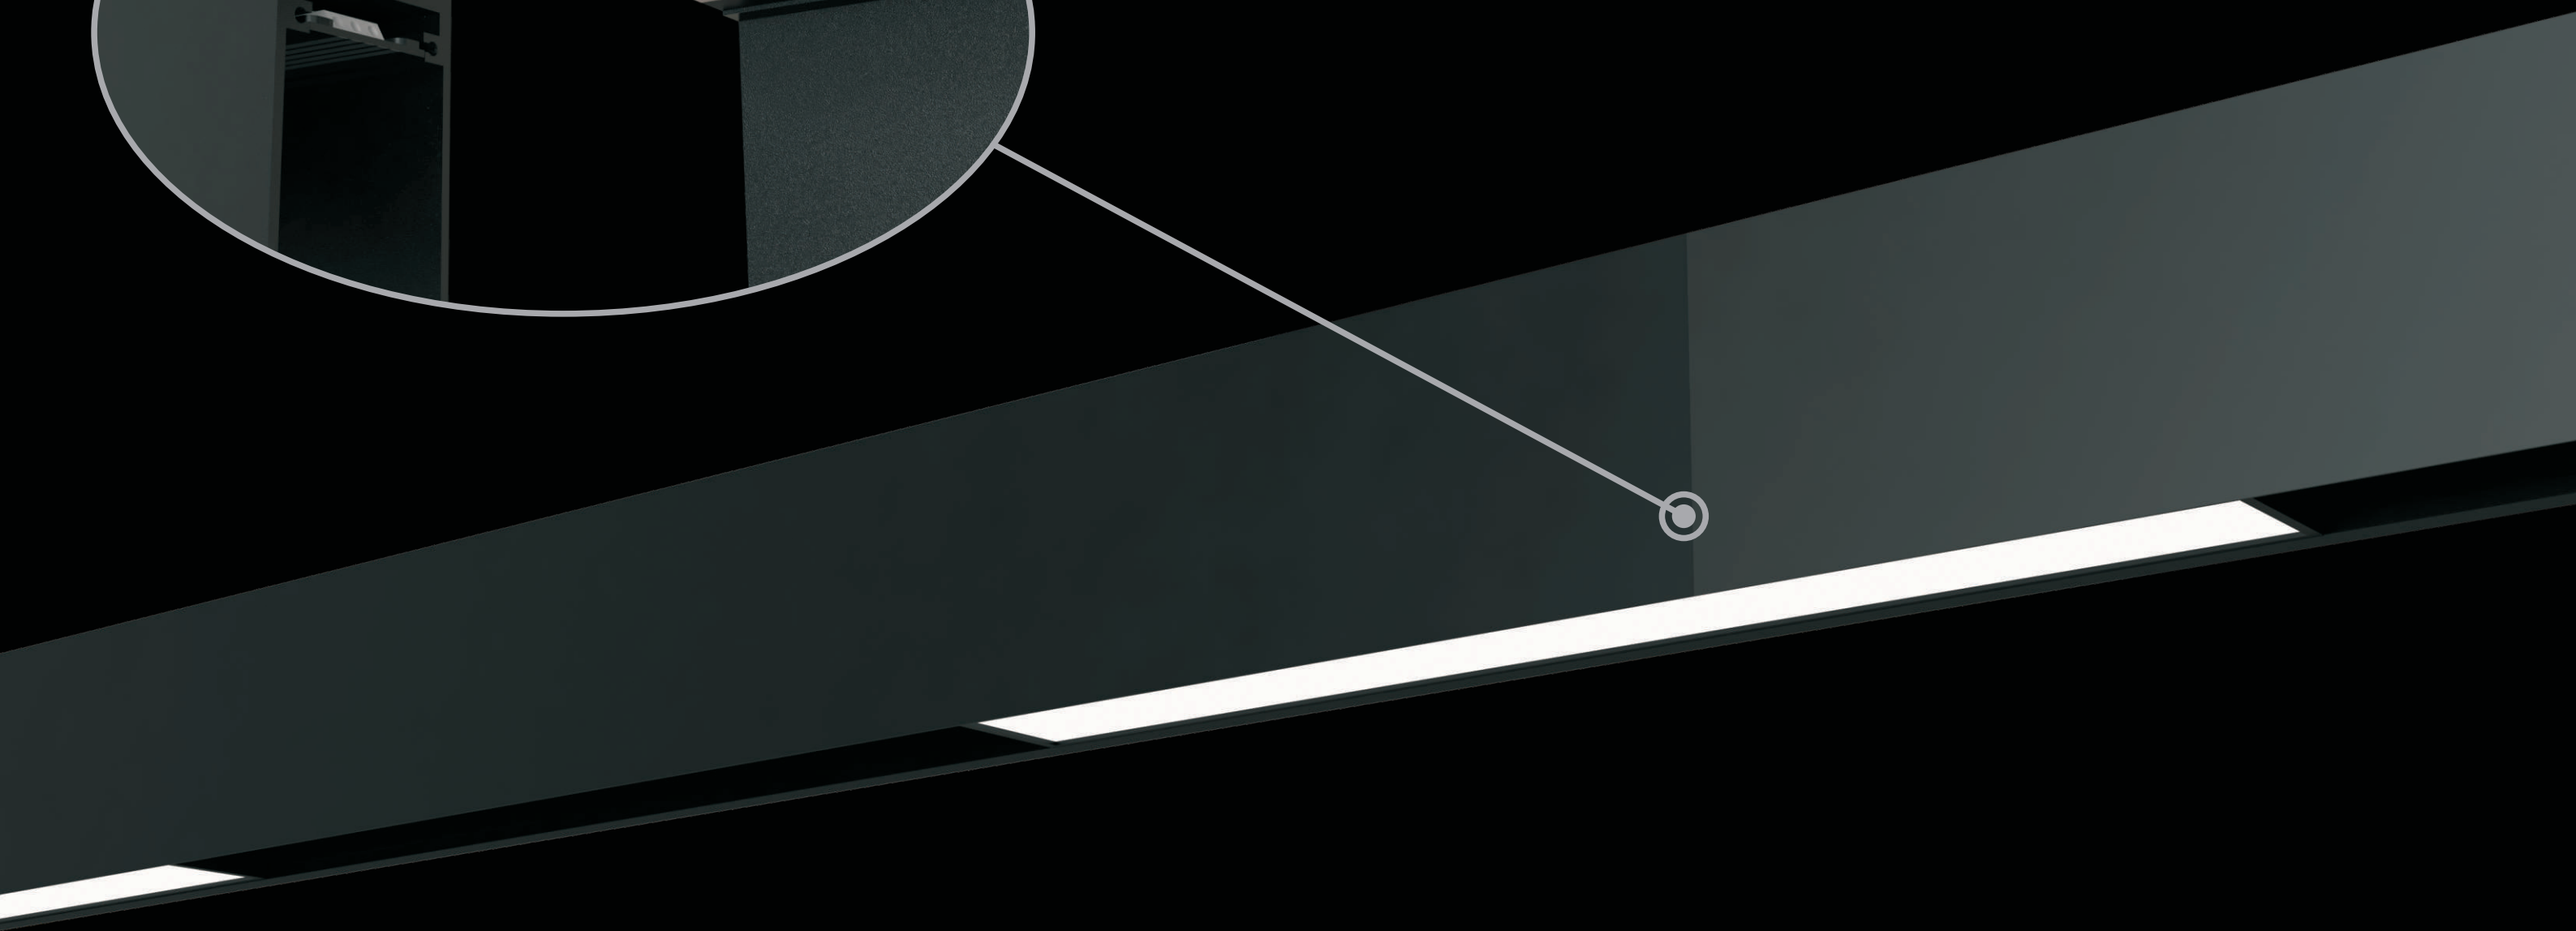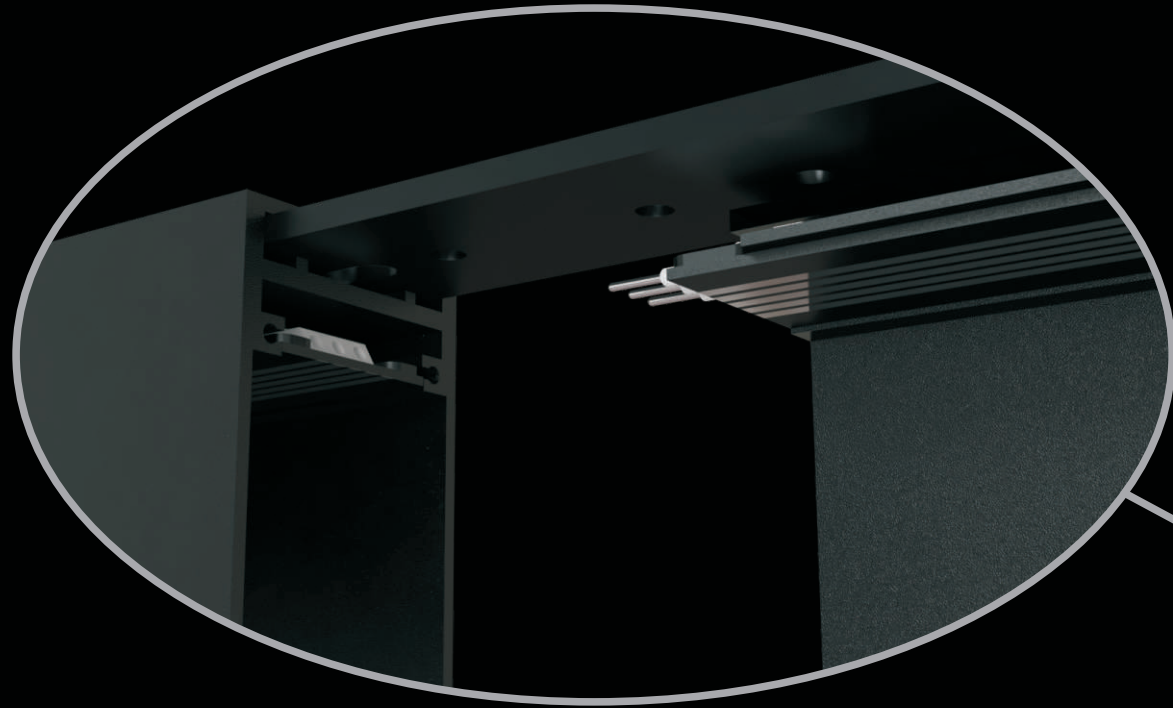

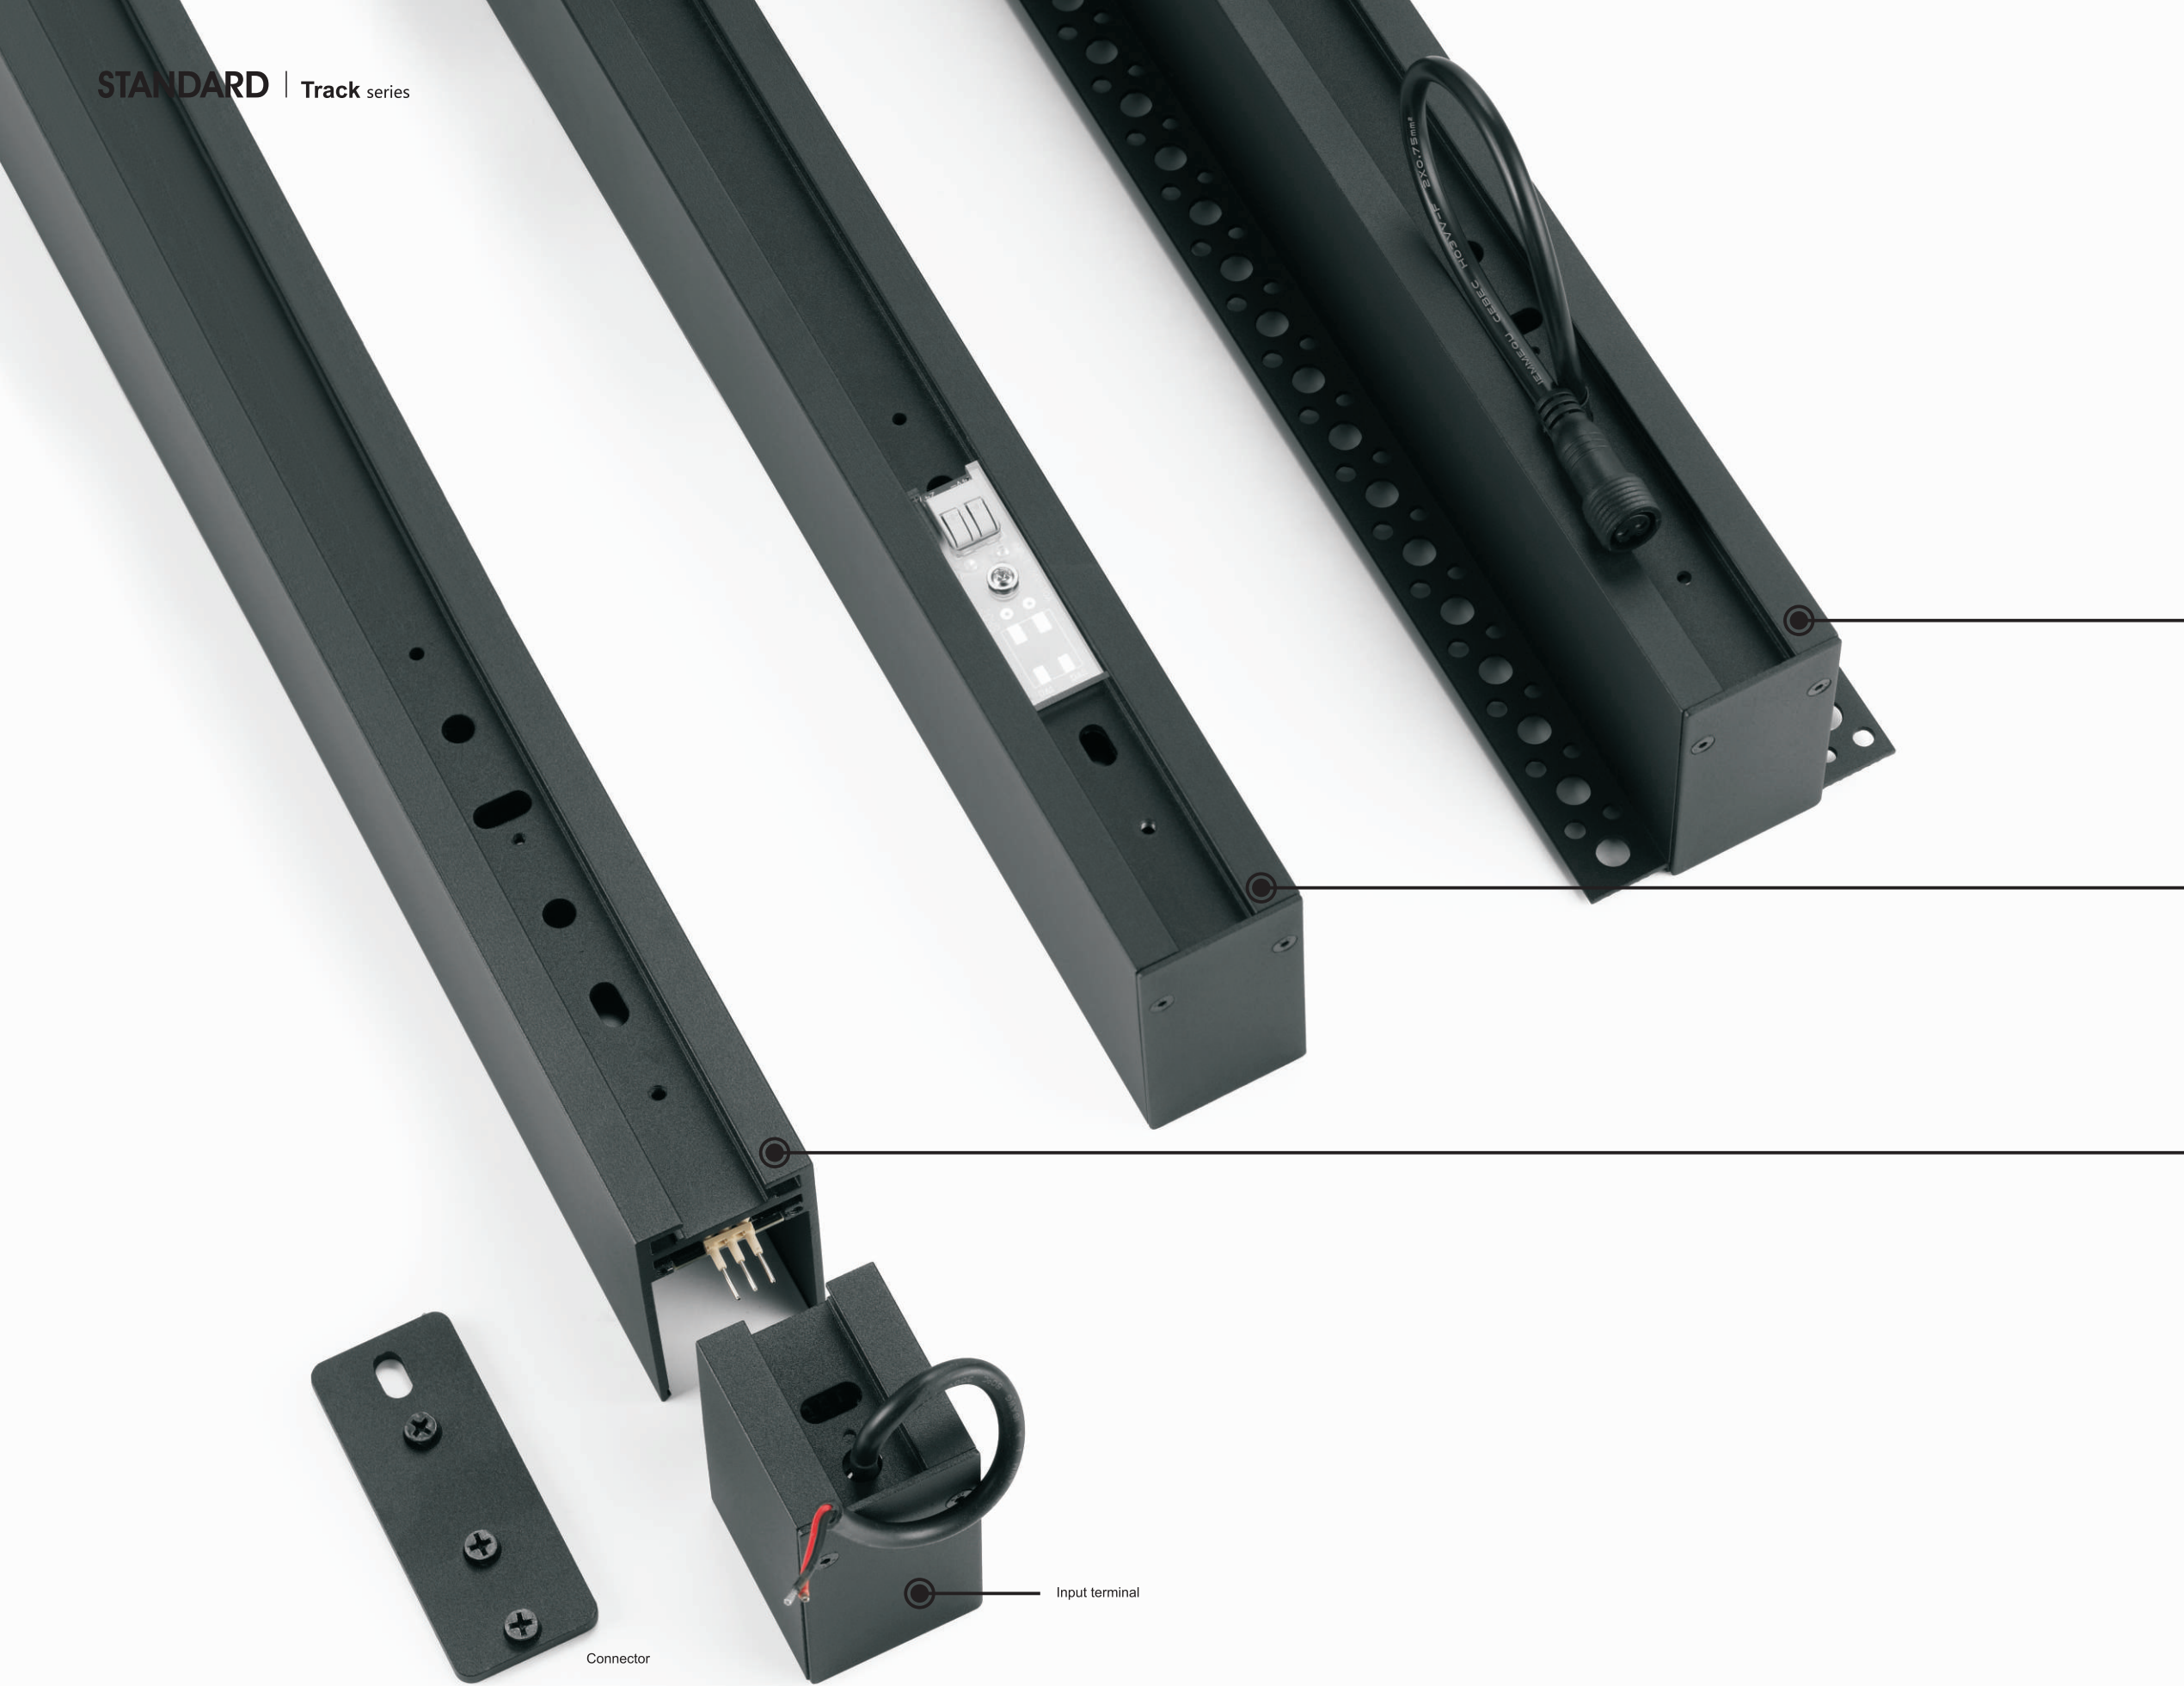

STANDARD

series



• Recessed



- Surface
- Pendant
- Recessed



TrackS-A

- Surface
- Pendant
- Recessed

US standard





Connector

Input terminal




Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black Sandy White Golden Black bronze

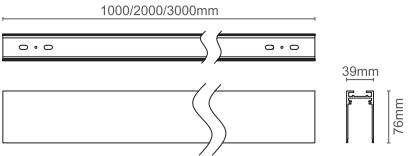

Model	Power	Install	Length
1 Meter profile	200W max	Recessed	1000mm
2 Meter profile	200W max	Recessed	2000mm
3 Meter profile	200W max	Recessed	3000mm

Sandy Black Sandy White Golden Black bronze



CORNER

L Corner

Sandy Black Sandy White



Inner Corner

Sandy Black Sandy White




Outer Corner

Sandy Black Sandy White



T corner

Sandy Black Sandy White




45D corner

Sandy Black Sandy White



CROSS corner


Sandy Black Sandy White



CORNER


L Corner-R

Sandy Black Sandy White




Inner Corner-R

Sandy Black Sandy White




Outer Corner-R

Sandy Black Sandy White



T Corner-R

Sandy Black Sandy White



POWER FEED

Input terminal


Sandy Black Sandy White



POWER FEED


Input terminal-R

Sandy Black Sandy White




ACCESSORIES


Recessed kit

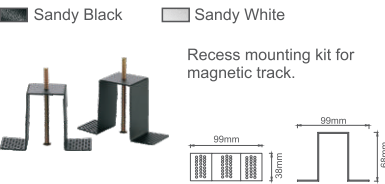

Pendant kit-A

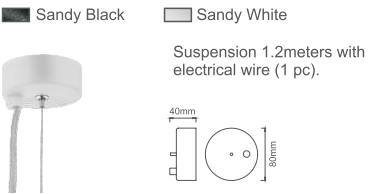


Pendant kit-B

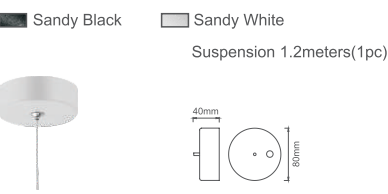

Track connector



Power plate 65mm

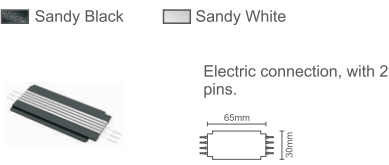


New surface mounted kits




Track cover




Track driver box

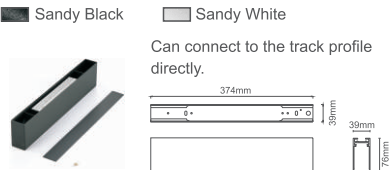

Driver box

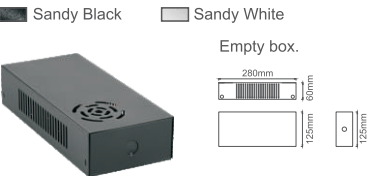

End cap



Pin2



Pin3



DOT01




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	120Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

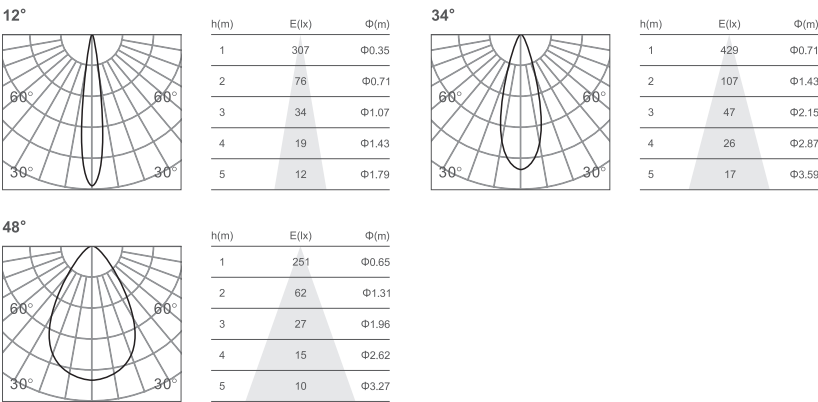

DOT03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	380Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

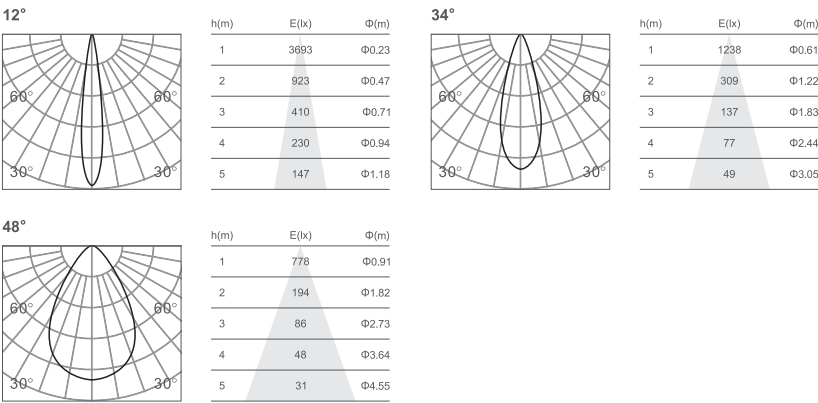



DOT06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra





h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29



DOT12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



h(m)	E(lx)	Φ(m)
1	3197	Φ0.84
2	799	Φ1.69
3	355	Φ2.54
4	199	Φ3.39
5	127	Φ4.24



Linear08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		



 Sandy Black  Sandy White

LIGHT DISTEIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



Linear16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTEIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99





Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

 Sandy Black  Sandy White


LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	426	Φ2.51
2	106	Φ5.02
3	47	Φ7.53
4	26	Φ10.04
5	17	Φ12.55



Linear96




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	2850Lm

 Sandy Black  Sandy White



LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	889	Φ2.23
2	222	Φ4.46
3	98	Φ6.69
4	55	Φ8.92
5	35	Φ11.15



Linear64




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	1900Lm

 Sandy Black  Sandy White


LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	479	Φ2.65
2	119	Φ5.30
3	53	Φ7.95
4	29	Φ10.60
5	19	Φ13.25





Fold03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	3683	Φ0.23
2	923	Φ0.47
3	410	Φ0.71
4	230	Φ0.94
5	147	Φ1.18



h(m)	E(lx)	Φ(m)
1	1238	Φ0.61
2	309	Φ1.22
3	137	Φ1.83
4	77	Φ2.44
5	49	Φ3.05



h(m)	E(lx)	Φ(m)
1	778	Φ0.91
2	194	Φ1.82
3	86	Φ2.73
4	48	Φ3.64
5	31	Φ4.55



Fold12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



h(m)	E(lx)	Φ(m)
1	3197	Φ0.84
2	799	Φ1.69
3	355	Φ2.54
4	199	Φ3.39
5	127	Φ4.24



Fold06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2680	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1806	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29





Fold08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	280Lm

Sandy Black Sandy White


LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



Fold16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	500Lm

Sandy Black Sandy White


LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99



Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

Sandy Black Sandy White


LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	234	Φ2.47
2	58	Φ4.95
3	26	Φ7.43
4	14	Φ9.90
5	9	Φ12.38





Washer13





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80 > 90	< 3	2700K 3000K 4000K	wallwasher	380Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

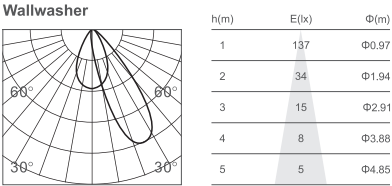

Washer27





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	wallwasher	880Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

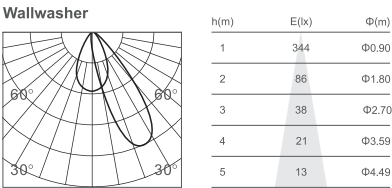

Out32





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

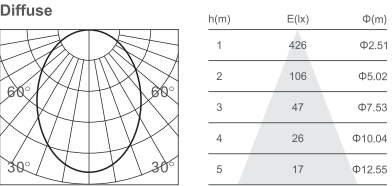

Out12





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	1550Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra

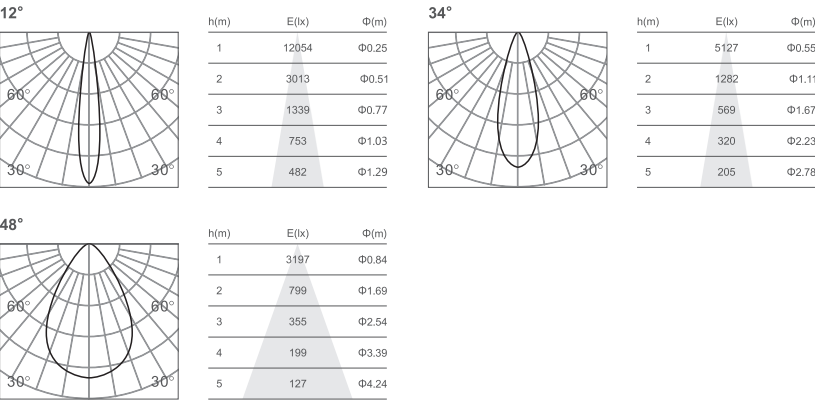

ADAPTERS

3 Adapters

Same spotlight heads + 3 kinds of adapters = 3 different system

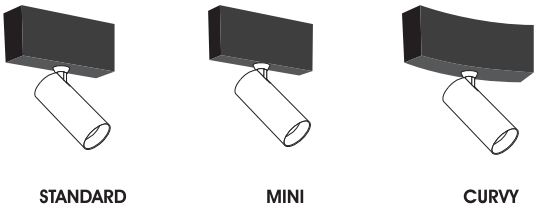

Spot



Pendant







Spot35



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K	20°	440Lm
			3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden

LIGHT DISTEIBUTION
3000K 80Ra

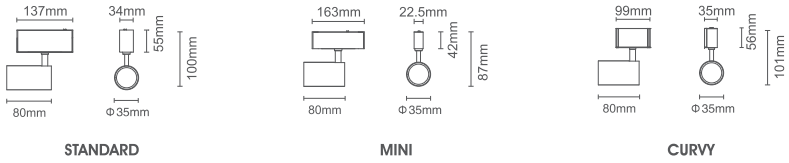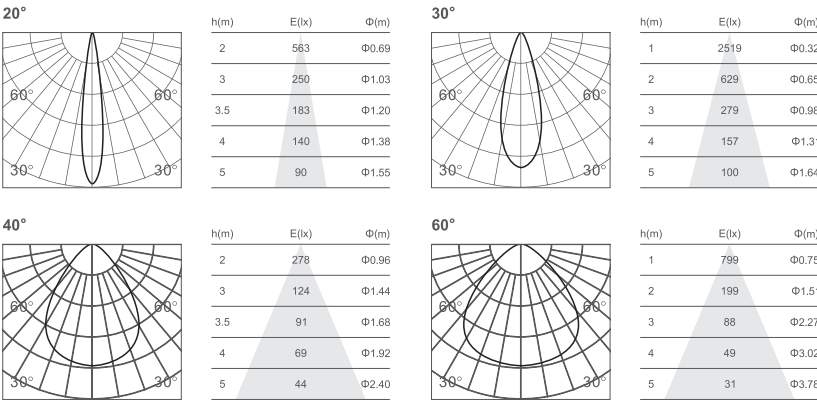



Spot35-T



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2x5W	> 80 > 90	< 3	2700K	20°	880Lm
			3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden

LIGHT DISTEIBUTION
3000K 80Ra

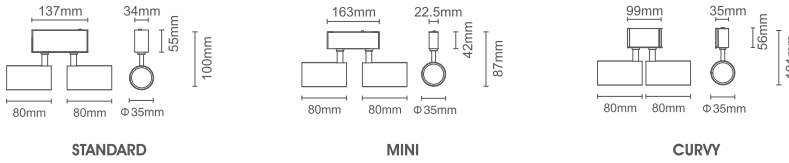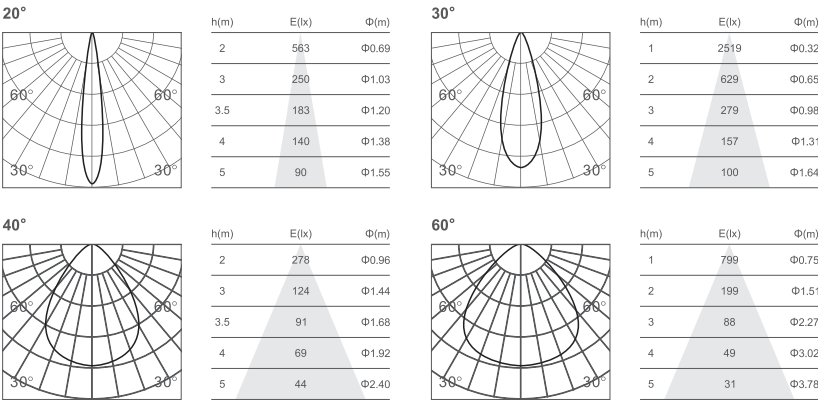





Spot50



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

Sandy Black Sandy White Golden

LIGHT DISTEIBUTION
3000K 80Ra

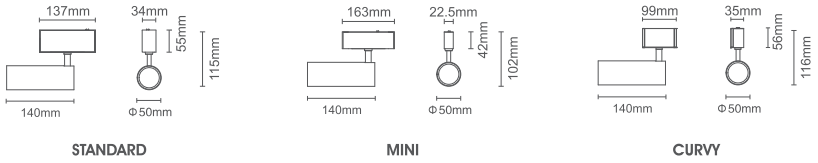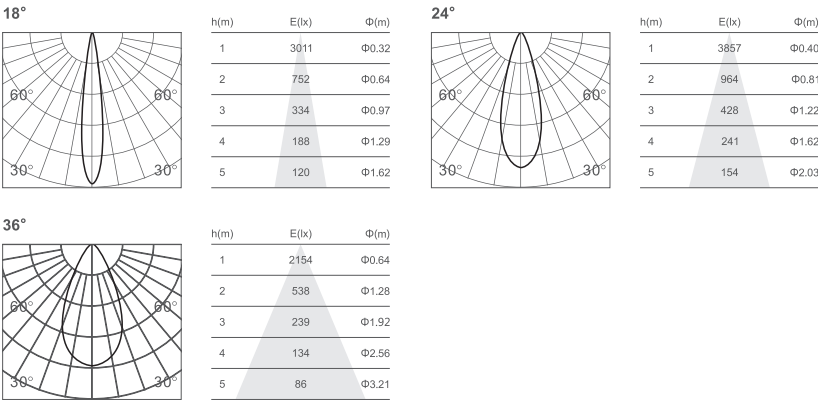



Spot65-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	10°	405Lm
	> 90		3000K	20°	
			4000K	30°	


Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
2	4203	Φ0.20
3	1051	Φ0.40
3.5	467	Φ0.61
4	262	Φ0.81
5	168	Φ1.02




h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33




h(m)	E(lx)	Φ(m)
2	699	Φ0.53
3	174	Φ1.06
3.5	77	Φ1.60
4	43	Φ2.13
5	27	Φ2.66



STANDARD



MINI



CURVY



Spot92-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80	< 3	2700K	10°	905Lm
	> 90		3000K	20°	
			4000K	30°	


Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	10271	Φ0.19
2	2568	Φ0.38
3	1141	Φ0.58
4	641	Φ0.77
5	410	Φ0.97




h(m)	E(lx)	Φ(m)
1	4847	Φ0.30
2	1212	Φ0.60
3	538	Φ0.90
4	302	Φ1.20
5	193	Φ1.51




h(m)	E(lx)	Φ(m)
1	2371	Φ0.46
2	592	Φ0.92
3	263	Φ1.38
4	148	Φ1.84
5	94	Φ2.30



STANDARD



MINI



CURVY



Spot50-S




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	15°	600Lm
	> 90		3000K	24°	
			4000K	36°	


Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	3011	Φ0.32
2	752	Φ0.64
3	334	Φ0.97
4	188	Φ1.29
5	120	Φ1.62




h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03




h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21



STANDARD



MINI



CURVY



Spot70




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
20W	> 80	< 3	2700K	15°	1450Lm
	> 90		3000K	24°	
			4000K	36°	


Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8050	Φ0.31
2	2012	Φ0.63
3	894	Φ0.95
4	503	Φ1.27
5	322	Φ1.59




h(m)	E(lx)	Φ(m)
1	5787	Φ0.47
2	1447	Φ0.95
3	643	Φ1.42
4	361	Φ1.90
5	231	Φ2.37




h(m)	E(lx)	Φ(m)
1	3344	Φ0.72
2	836	Φ1.44
3	371	Φ2.17
4	209	Φ2.89
5	133	Φ3.61




STANDARD



MINI




CURVY



Angle adjustment

Halo spot




Φ164mm




Φ120mm

Halo linear



Φ164mm



Φ120mm




Halo-D18




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	24°	1750Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black ■ Sandy White

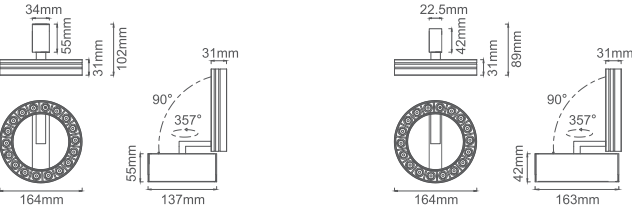

STANDARD

MINI



CURVY




Halo-L16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	Diffuse	950Lm
	> 90		3000K		
			4000K		

■ Sandy Black ■ Sandy White

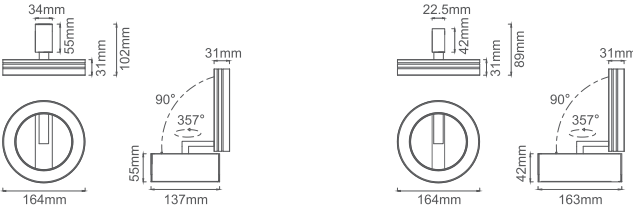

STANDARD

MINI



CURVY




Halo-D12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	24°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White



STANDARD



MINI



CURVY




Halo-L12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	Diffuse	650Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White



STANDARD



MINI



CURVY







Pendant35-R



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden Black bronze

LIGHT DISTEIBUTION
3000K 80Ra

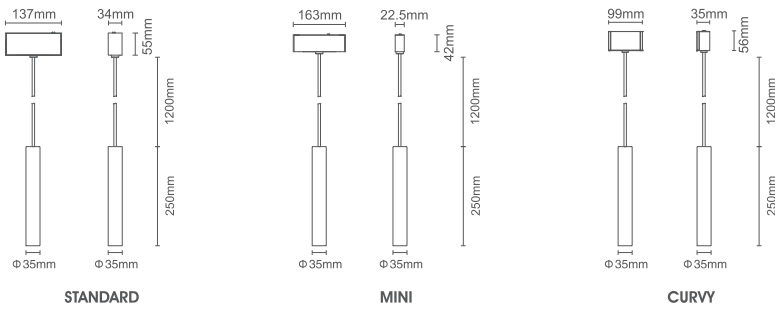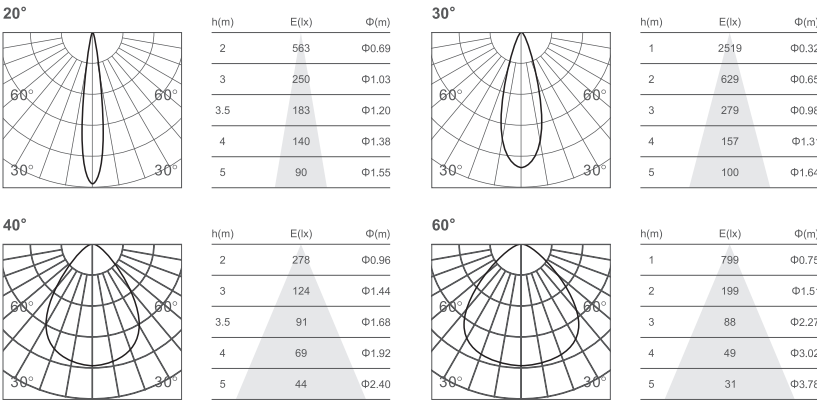



Pendant50-R



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

Sandy Black Sandy White Golden Black bronze

LIGHT DISTEIBUTION
3000K 80Ra

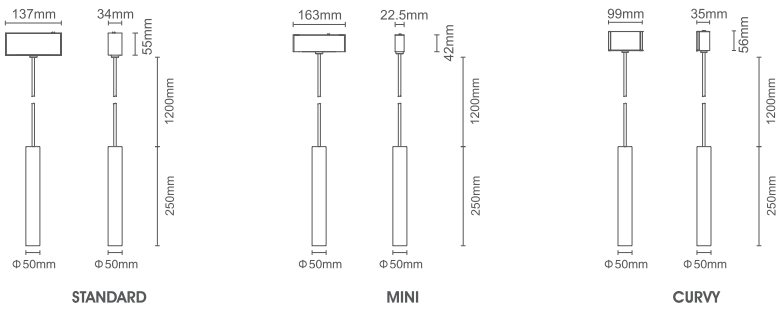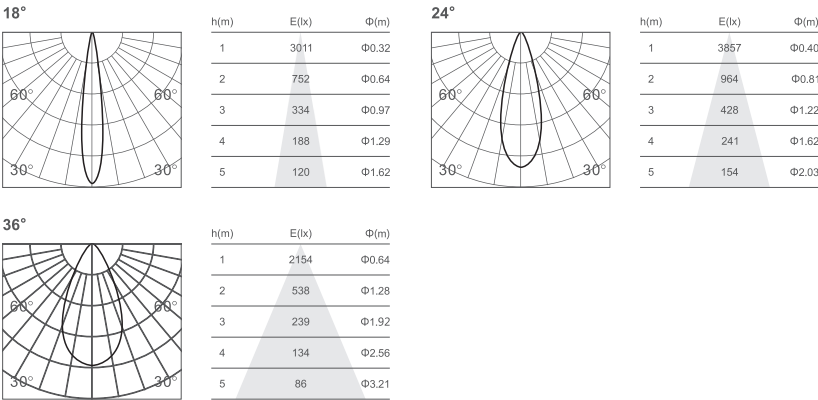





Pendant-glory



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	480Lm

 Sandy Black  Sandy White

LIGHT DISTEIBUTION
3000K 80Ra

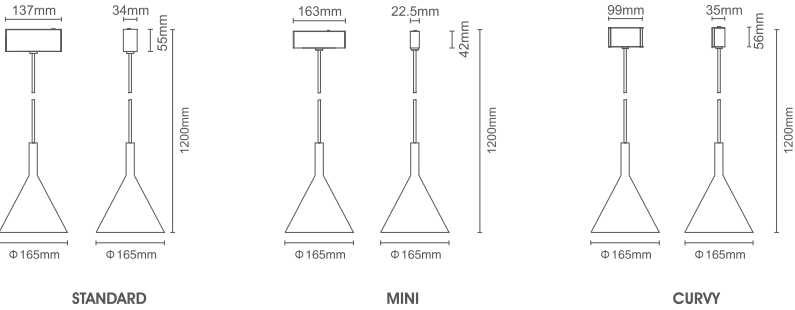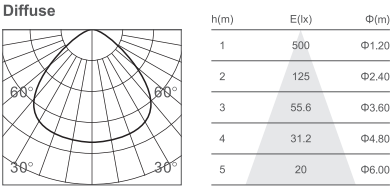





Pendant-global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	290Lm

 Sandy Black  Sandy White


LIGHT DISTEIBUTION
2700K 80Ra

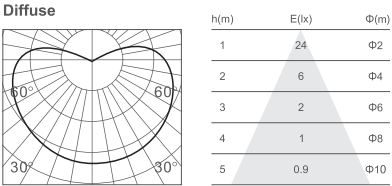

STANDARD



MINI



CURVY





Global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	290Lm

 Sandy Black  Sandy White


LIGHT DISTEIBUTION
2700K 80Ra

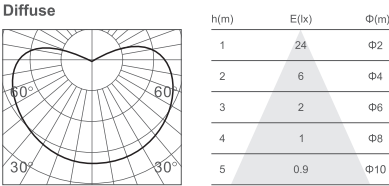

STANDARD



MINI






CURVY



MINI



series





Model	Power	Install	Length
1 Meter profile-s	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile-s	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile-s	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black Sandy White Golden Black bronze

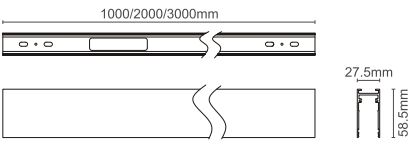

CORNER

L corner-s

Sandy Black Sandy White



Inner corner-s

Sandy Black Sandy White



Outter corner-s

Sandy Black Sandy White



T corner-s

Sandy Black Sandy White



45D corner-s

Sandy Black Sandy White




Cross corner-s

Sandy Black Sandy White



Model	Power	Install	Length
1 Meter profile-s	200W max	Recessed	1000mm
2 Meter profile-s	200W max	Recessed	2000mm
3 Meter profile-s	200W max	Recessed	3000mm


Sandy Black Sandy White Golden Black bronze



CORNER


L corner-R-s

Sandy Black Sandy White




Inner corner-R-s


Sandy Black Sandy White



Outter corner-R-s

Sandy Black Sandy White



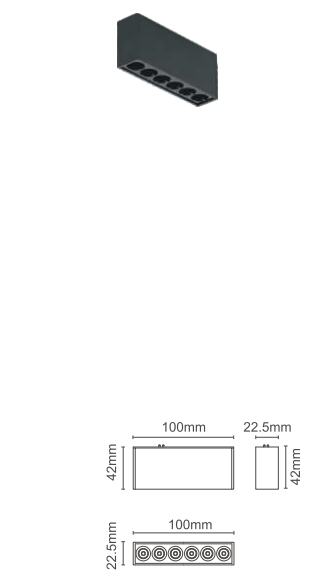

Dot06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
6W	> 80	< 3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra



h(m)	E(lx)	Φ(m)
1	3669	Φ0.37
2	917	Φ0.74
3	407	Φ1.11
4	229	Φ1.48
5	146	Φ1.85



h(m)	E(lx)	Φ(m)
1	2577	Φ0.41
2	644.2	Φ0.83
3	286.3	Φ1.25
4	161	Φ1.67
5	103	Φ2.09



h(m)	E(lx)	Φ(m)
1	1654	Φ0.63
2	413	Φ1.26
3	183	Φ1.89
4	103	Φ2.53
5	66	Φ3.16



Dot24-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
24W	> 80	< 3	2700K	18°	2400Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	16424	Φ0.33
2	4106	Φ0.66
3	1825	Φ0.99
4	1027	Φ1.33
5	657	Φ1.66



h(m)	E(lx)	Φ(m)
1	8554	Φ0.45
2	2139	Φ0.90
3	950	Φ1.36
4	534	Φ1.81
5	342	Φ2.27



h(m)	E(lx)	Φ(m)
1	6074	Φ0.62
2	1518	Φ1.25
3	674	Φ1.87
4	379	Φ2.50
5	243	Φ3.12

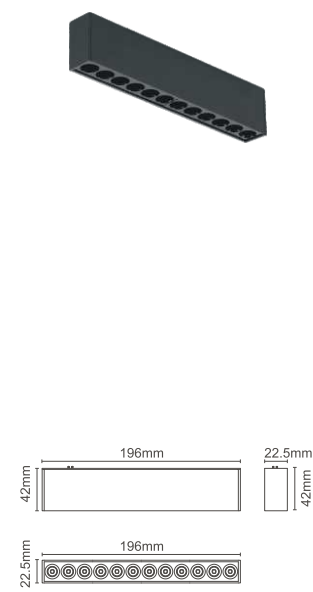

Dot12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra







h(m)	E(lx)	Φ(m)
1	8122	Φ0.33
2	2031	Φ0.67
3	902	Φ1.01
4	507	Φ1.35
5	324	Φ1.69



h(m)	E(lx)	Φ(m)
1	4110	Φ0.45
2	1027	Φ0.90
3	456.7	Φ1.36
4	256.9	Φ1.81
5	164.4	Φ2.26



h(m)	E(lx)	Φ(m)
1	3006	Φ0.65
2	751	Φ1.31
3	334	Φ1.97
4	187	Φ2.63
5	120	Φ3.28



Linear20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	460Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	170	Φ2.50
2	42	Φ5.01
3	18	Φ7.52
4	10	Φ10.03
5	6	Φ12.54

Linear40-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	900Lm

Sandy Black Sandy White


LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	359.7	Φ2.11
2	89.9	Φ4.23
3	39.9	Φ6.35
4	22.4	Φ8.47
5	14.3	Φ10.5



Linear80-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
30W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	1800Lm

Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	674.1	Φ2.22
2	168.5	Φ4.44
3	74.9	Φ6.66
4	42.1	Φ8.88
5	26.9	Φ11.11



Fold06-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	18°	650Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	3669	Φ0.37
2	917	Φ0.74
3	407	Φ1.11
4	229	Φ1.48
5	146	Φ1.85



h(m)	E(lx)	Φ(m)
1	2577	Φ0.41
2	644.2	Φ0.83
3	286.3	Φ1.25
4	161	Φ1.67
5	103	Φ2.09



h(m)	E(lx)	Φ(m)
1	1654	Φ0.63
2	413	Φ1.26
3	183	Φ1.89
4	103	Φ2.53
5	66	Φ3.16



120mm



Fold12-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	18°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8122	Φ0.33
2	2031	Φ0.67
3	902	Φ1.01
4	507	Φ1.35
5	324	Φ1.69



h(m)	E(lx)	Φ(m)
1	4110	Φ0.45
2	1027	Φ0.90
3	456.7	Φ1.36
4	256.9	Φ1.81
5	164.4	Φ2.26



h(m)	E(lx)	Φ(m)
1	3006	Φ0.65
2	751	Φ1.31
3	334	Φ1.97
4	187	Φ2.63
5	120	Φ3.28



120mm



Fold10-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	460Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTEIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	189	Φ2.35
2	47	Φ4.71
3	21	Φ7.07
4	11	Φ9.43
5	7	Φ11.78



120mm



Fold20-s




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	Diffuse	900Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTEIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	321	Φ2.38
2	80	Φ4.77
3	35	Φ7.16
4	20	Φ9.55
5	12	Φ11.94



120mm



Pendant



Surface




Recessed

CURVY MAGNETIC SYSTEM

With the brand new track addition
The curvy system bring you more inspiration

Black White Golden Black bronze


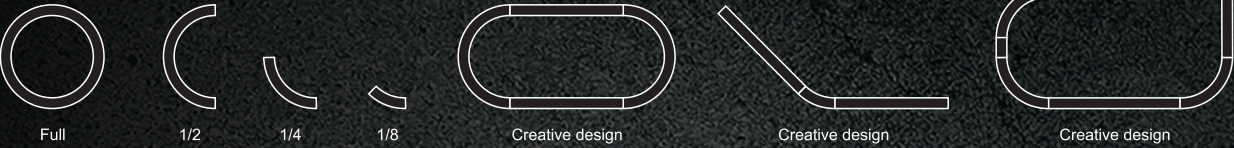




Curvy Full-D9





Power	Install
200W max	Surface/Pendant/Recessed
Sandy Black Sandy White Golden Black bronze	

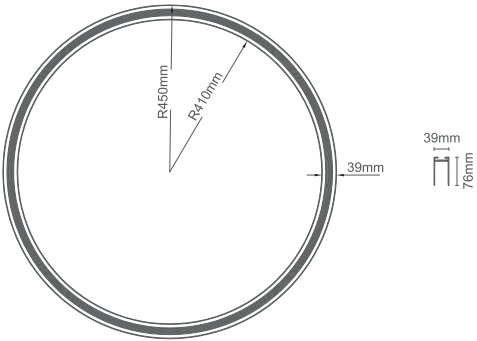

Curvy 1/4-D9





Power	Install
200W max	Surface/Pendant/Recessed
Sandy Black Sandy White Golden Black bronze	



Curvy 1/2-D9





Power	Install
200W max	Surface/Pendant/Recessed
Sandy Black Sandy White Golden Black bronze	

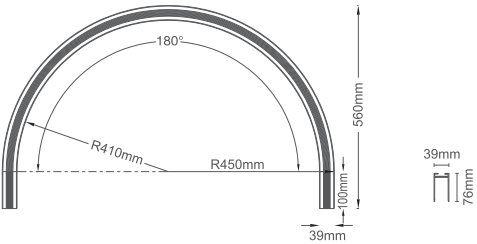

Curvy 1/8-D9



Power	Install
200W max	Surface/Pendant/Recessed
Sandy Black Sandy White Golden Black bronze	





Dot03-D9




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	


Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	5125	Φ0.17
2	1281	Φ0.35
3	569	Φ0.53
4	320	Φ0.71
5	205	Φ0.89



h(m)	E(lx)	Φ(m)
1	1560	Φ0.61
2	390	Φ1.23
3	173	Φ1.85
4	97	Φ2.47
5	62	Φ3.07



h(m)	E(lx)	Φ(m)
1	1579	Φ0.57
2	394	Φ1.15
3	175	Φ1.73
4	98	Φ2.31
5	63	Φ2.89



Dot06-D9




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


Sandy Black Sandy White

LIGHT DISTEIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8069	Φ0.19
2	2017	Φ0.38
3	896	Φ0.57
4	504	Φ0.76
5	322	Φ0.96



h(m)	E(lx)	Φ(m)
1	2800	Φ0.53
2	700	Φ1.07
3	311	Φ1.60
4	175	Φ2.14
5	112	Φ2.67



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



Linear16-D9




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		


Sandy Black Sandy White

LIGHT DISTEIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	119	Φ2.56
2	29	Φ5.12
3	13	Φ7.68
4	7	Φ10.24
5	4	Φ12.81



ACCESSORIES

Recessed kit-R

Sandy Black Sandy White

